


Proper Sequencing and Orientation of AirPave GeoCell Panels for Rapid Installation

Pallet Staging: AirPave pallets cover approximately 798sqft. per pallet and should be staged accordingly within the installation area to minimize the amount of time to stage the AirPave grid. AirPave pallets are typically placed every 65 feet across and 15-20 feet back from each other. (Call AirField with questions that you might have about proper staging and installation.)

All Installations must start in the Top Left Corner of the project and work Left to Right to be installed properly.

1. Orientate the AirPave GeoCell materials with the integral indicator tab to the panel's bottom left corner (painted yellow). **Install the AirPave units by placing units with connectors and the pinning platforms flush against the prepared subbase. If the female connectors do not go over the male connectors then the orientation is incorrect, please call AirField Systems Immediately at 405-359-3775**

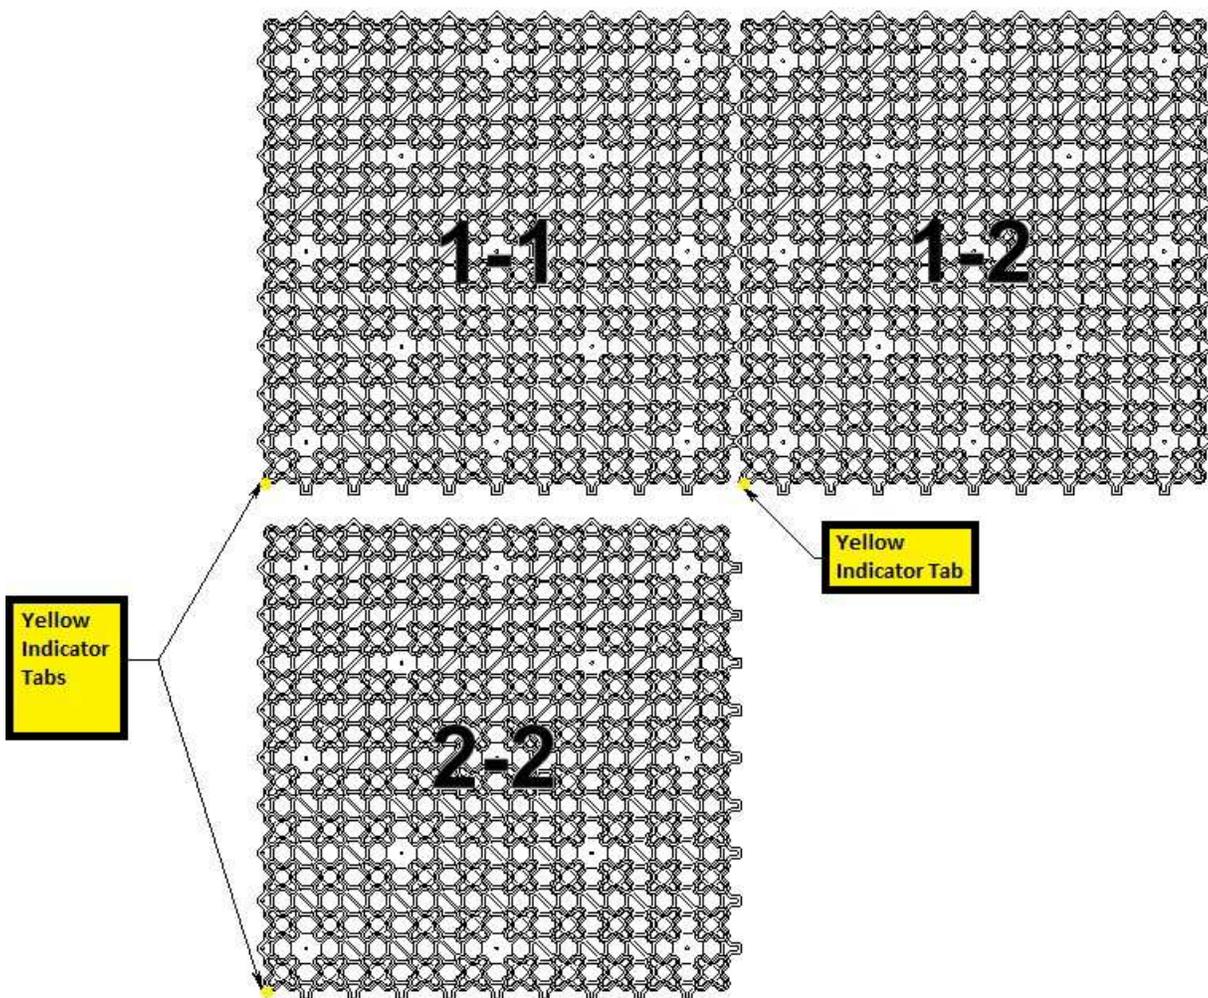

2. Install the AirPave panels across the field in a rowed pattern. Staggering of rows will allow for multiple row completion by a multi-manned crew.

3. Secure the first panel to the base with pins (Only in AirPave grass pave installations) and commence with panels 1-2, 1-3, and so on with one directional pull to secure. (Optional)
4. Once the first row has progressed across the project, start with a second row. Have a person staging the panels in groups of three snapped together along the row. The crew can then install the left side of the panel while elevating slightly the top portion (so the male and female connectors don't touch each other) once the left side has been snapped with a pull along the row direction, the top portion should fall into place and with a bottom vertical pull holding the inside of parts 1 & 3 snap all three parts in place.



5. AirPave panels can be shaped to individual field areas as needed with appropriate cutting device.
 - A. If only a few parts need to be trimmed, use tin snips.
 - B. If many parts require trimming, set up a table and use a circular saw with a no melt, plastic cutting saw blade.
6. AirPave units placed on curves and slopes shall be anchored to the base course, using 8 inch (203 mm) Chisel Point Pins 6 gauge BB Wire and 1 1/2 (35 mm) round attached washers, as required to secure units in place.

DISCLAIMER: The preceding and following drawings and/or general installation guidelines are provided only to show a concept design for installation and are not instructions for any particular installation. These drawings and general instructions are not complete and are provided only to assist a licensed Geo-Technical Engineer, a Landscape Architect and/or Civil Engineer in preparing actual construction and installation plans. These drawings and instructions must be reviewed by a licensed Geo-Technical Engineer, a Landscape Architect and/or Civil Engineer and adapted to the condition of a particular installation site and to comply with all state and local requirements for each installation site. THESE DRAWINGS AND/OR GENERAL INSTRUCTIONS DO NOT MODIFY OR SUPPLEMENT ANY EXPRESS OR IMPLIED WARRANTIES INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IF APPLICABLE RELATING TO THE PRODUCT.